

**2011**  
C.W.S.S.A.  
Central Wisconsin Super Stock Association  
Rules and Specifications  
Revised 12/2010

Matt Raykowski C.W.S.S.A. President Home: 1-715-341-6542

John Zuch: C.W.S.S.A. Vice President Home:

**POINTS AND MEMBERSHIP-**

CLUB MEMBERSHIP: \$20.00.

ALL drivers must be paid members of the C.W.S.S.A. (Central Wisconsin Super Stock Association) or will not be allowed to compete.

ALL MEMBERS MUST RUN CLUB AND TRACK POINT FUND SPONSOR DECALS IN DESIGNATED AREA AT ALL TIMES TO BE ELIGIBLE FOR ANY MONEY OR POINTS FOR THE NIGHT.

- CARS DEEMED ILLEGAL BUT ARE ALLOWED TO COMPETE BY TRACK MANAGEMENT WOULD NOT BE ELIGIBLE FOR TRACK OR CLUB POINTS.
- TRACK AND CLUB POINTS FUND INFORMATION WILL BE AVAILABLE AS NEGOTIATED

All drivers under the age of 18 must present a notarized release statement from parent or guardian before they will be allowed to compete and receive track operator approval. Both parents must sign release if divorced

**1 FRAME-**

- A. Must have stock, original equipment frame with manufactures wheel base, minimum 108".
- B. No frame lightening will be allowed, such as hole drilling, acid dipping, etc.
- C. The frame must remain stock in front of the rear spring buckets.
- D. Rear frame section, behind spring buckets, may be replaced with new tubing .095 or greater in thickness if that area was rotted out or unsafe for racing conditions.
- E. No cutting out of center section such as to shorten wheel base, etc.
- F. Front cross member may be cut out for oil pan and fuel pump clearance.
- G. Maximum tread width front and rear for any .metric frame used 63 1/2 inches. Will allow minor adjustments to the 63-1/2 inch width rule to other chassis with tire clearance problems between A-arms, tie rods, and frame. Width measured from inside of rim to outside of opposing rim.
- H. Minimum ground clearance of 4", excluding exhaust system. All measurements will be taken with the driver in the car.
- I. Frame, ballast's, etc. behind the rear axle must be a minimum of 11" off ground.
- J A 360 degree steel drive shaft catch hoop is mandatory maximum of 12 inches behind transmission tail shaft seal (not a piece of Chain ).

**2 ROLLAGE-**

- A. NEW CARS, any car constructed after the 1997 season will be required to conform to the roll cage specs. (See back page)
- B. PRE 1997 CARS
  - 1. The roll bar tubing is to be a minimum of 1 3/4" diameter and .095 wall thickness.
  - 2. The main cage roll bar must measure 39" from the top of frame to the top of roll bar or body mount.
  - 3. A minimum of 100 sq. inches of 1/8" steel mounting plate at the base of all cage uprights is required on all uni-body cars.
  - 4. Any uni-body car must have adequate frame connectors welded into place.
  - 5. All welded joints must be gusted.
- C. ALL CARS, 1/8" steel doorplate minimum size of 23 "h x 40"w along with adequate foot protector plate is mandatory.
- D. Tech inspectors reserve the right to disqualify for unsafe cars.

### **3 BODY-**

#### A. General

1. Body must remain in factory location, and be stock appearing.
2. No setback bodies will be allowed.
3. No holes in hood or deck lid other than for pin type fasteners, (also see section 2-8 air intake rules)
4. The minimum roof height for all cars will be 50" from the ground. All measurements will be taken with the driver in the car.
5. Body behind rear tires may be no lower than rocker panel height.
6. No dirt style or truck bodies.
7. Rear spoiler maximum dimensions will be 5" high and 60" wide with no side wings or front mount supports, a maximum height of 40" from the ground.
8. The leading edge of the front spoiler will not be ahead of the front bumper, (some variation will be allowed due to the use of after market plastic noses) and have a minimum ground clearance of 4". All measurements are taken with the driver in the car.
9. Unsafe or unnecessary modifications will not be allowed and are subject to the judgment of the tech official.
10. The entire back end of car must be covered with material so as to make it look stock appearing

#### B. Stock Steel Bodies

1. Any OEM body with a minimum wheelbase of 104" and is of mid-size origin and placed on a stock OEM frame.
2. Stock plastic grills must be removed and replaced with sheet metal or mesh.

#### C. Aftermarket Bodies

1. After market short track steel, fiberglass or aluminum bodies (no year restriction) will be allowed as long as they are of mid-size origin and placed on a stock OEM frame.
2. No light weight fiberglass or carbon fiber.

### **4 GLASS-**

- A. All factory glass must be removed
- B. Full front lexan windshield required with two upright braces, 1/8 inch by 1 inch steel or aluminum minimum...
- C. Side window openings measured from center side roof post forward must be a minimum of 31" to allow safety crew accesses.
- D. Rear and quarter side windows may be covered with lexan, except for drivers and passenger's door windows.

### **5 INTERIOR-**

- A. The stock OEM firewall and cowl may be replaced with minimum 20-gauge steel and must be welded to the floor plate.
- B. The floor area and the area along side the driver's compartment must be sealed as not to let debris into the drivers compartment.
- C. All cars are to have a mandatory 1/8" steel plate under the driver's compartment/seat measuring 20" wide and stretching from rear roll cage upright to where it meets the firewall. The area by the driver's feet may be trimmed for engine, transmission, exhaust, or linkage clearance only
- D. Interior panels may be replaced with minimum 22-gauge aluminum
- E. Passenger side floor panel may be raised from tunnel height level to top of passenger door.
- F. Interior panels must completely isolate interior area from engine compartment, trunk area, and track.

### **6 SUSPENSION-**

- A. Screw jacks or spring adjusters are allowed in the front and rear suspension.
- B. Front lower control arms must remain stock for frame being used and be located in stock position.
- C. Front lower suspension mounts must remain in stock position.
- D. Front upper control arm mounts may be modified and turned parallel with frame.
- E. Front upper "A" arm may be modified for travel clearance or after market tubular upper control arm may be used.
- F. Coleman steel Impala front hub and rotor (pt # 102-600) or equivalent, used with stock brake calipers only is allowed.
- G. Heavy-duty stock GM, Ford, or Chrysler spindles are optional. No after market spindles are allowed.
- H. Adjustable upper and lower mono ball joints are allowed, Heim joint ended shocks are allowed, Heim joints are allowed on the Outer tie rod end only.
- I. Heim joints are not allowed on the rear control arms, front control arms, or inner tie rod ends.
- J. Polyurethane or steel bushings may be substituted for stock OEM rubber bushings.
- K. One shock absorber per wheel. Rear shocks must be mounted in stock location. Front shocks must be mounted to lower control Arm. Shocks must retail for less than \$100.00 each. Absolutely no coil over shocks allowed. We will have a list of shocks that were allowable when \$100.00 rule went into effect
- L. Rear upper control arm frame mounts may be raised.
- M. Stock trailing arms must be used on any rear end for mounting but may be enclosed with steel for safety, No after market rear Trailing arms allowed.

- N. No independent rear suspensions allowed.
- O. Eccentric adjustable mounting bolt may be used on lower rear end mounts, however the factory frame mounts for the trailing arms must be used.
- P. Tech inspectors reserve the right to disqualify for unsafe modifications.

## **7 TOWHOOKS-**

- A. Front and rear tow hooks are mandatory. These hooks must be within easy reaching of the safety crew and be constructed of a minimum of 5/16" diameter material. (*Track rule*)
- B.

## **8 AIRINTAKE-**

- A. The cowl may be modified slightly for engine clearance only. No modification is allowed to help force air into the air box or carburetor. Air boxes are allowed. Bubbling of the hood up to 5 inches maximum from the top offenders will be allowed.

## **9 DRIVE TRAIN AND TRANSMISSION-**

- A. No late model aluminum clutches or flywheels.
- B. Minimum of 10" diameter clutch is required. An adequate inspection hole in the bell housing is required. (Lakewood scatter shields are recommended). If necessary, transmissions may be pulled for clutch inspection after the feature race. If a driver refuses to pull their transmission he/she will lose all points and money for the night and the money will go to the C. W.S.S.A. point fund.
- C. Ford 9" rear end may be substituted; using stock trailing arms, and stock location for springs mounts for frame.
- D. Rear end may not be offset.
- E. No floater type hubs, axles, aluminum carrier housings, aluminum spools, gold track or Detroit locker rear ends. Rear ends must be locked spool type or welded carrier.
- F. Manual transmissions 3, 4, or 5 speed stock, unaltered is allowed.
- G. OEM automatic transmissions with factory cases only are allowed. Must have working internal front pump, all forward and reverse gears must work, and must have a working torque converter.
- H. No aluminum drives shafts.
- I. All drive shafts must be painted white and the car number displayed on them.

## **10 WHEELS-**

- A. Maximum of 8" inch rim width.
- B. Steel racing rim mandatory.
- C. A minimum of 1" lug nuts on all rims is mandatory.

## **11 ENGINES-**

- A. Block
  1. A maximum 358 CI small block with a maximum compression of 10.5 to 1 for all GM or Ford engines will be allowed.
  2. A maximum 366 CI small block with a maximum compression of 10.5 to 1 for Mopar engines will be allowed.
  3. Must be stock cast iron.
  4. No dry sump systems.
  5. Tech officials may check engine compression and cubic inches at any time.
- B. Intake
  1. No tampering with intake manifolds
  2. Must be stock cast iron.
  3. Stock cast iron Quadra jet, 4bbl, or 2-bbl intake manifolds only! No high rise intakes (after market, marine, or factory production).
- C. Camshaft/Valve Train
  1. No roller cams or roller lifters.
  2. Stamped or cast steel roller tip rockers allowed, no aluminum.
- D. Heads
  1. Must be stock cast iron.
  2. Chevrolet Vortec heads are allowed.
  3. No Dart or angle plug type heads.
  4. Ford M-6049-E351 heads are allowed on Ford motors
  5. World product Ford Head # 053040 bare casting is allowed.
- E. General
  1. Once these motors have cleared tech inspection they will be sealed so that any modifications will be apparent.
  2. No Bowtie. SVO, or Mopar HI-PERF engine blocks, heads, and intakes allowed.

3. No titanium parts anywhere.
4. No porting or polishing.

## **12 ENGINE PLACEMENT AND SET BACK-**

- A. Engines must not be left of center in frame.
- B. A maximum set back of 1" from the stock location allowed (measured from the top front steering box mounting bolt to the #1 spark plug, this measurement equals 13 1/2").
- C. If you are putting a Ford or Mopar engine in a GM metric frame the measurement for the location of the engine is as follows- measuring from the top steering box mounting bolt to the engine block mounting surface the measurement will be 33-1/2" if your engine is set back the allowable 1".
- D. Engine placement in chassis other than GM metric may run center of #1 spark plug to center of upper ball joint.
- E. Solid motor mounts may be used.
- F. Minimum crank height 12" measured center of crank to level ground.

## **13 IGNITION SYSTEMS-**

- A. Factory style ignition systems only. (Single point, dual point, HEI, Ford electronic, and Chrysler electronic).
- B. No spark boxes or magnetos allowed.
- C. No crank triggers.

## **14 EXHAUST-**

- A. Stock cast iron log style manifolds or economy type headers allowed.
- B. Stock exhausts manifold systems
  1. Must be stock cast iron manifolds, no tampering with exhaust manifolds.
  2. A maximum of 2 1/2" exhaust pipes in and a single 3 1/2" out of muffler (this is a 2 into 1 type system using a single muffler) if one uses 2 mufflers a maximum of 2 1/2" exhaust pipes in and out of mufflers will be allowed.
- C. Header systems
  1. Economy type headers only.
  2. Over or under chassis headers allowed.
  3. 1 5/8 inch maximum primary tube diameter.
  4. 3 inch maximum collector diameter.
  5. 3 inch maximum pipe diameter before muffler, X or Y pipes.
  6. No 180 degree or stepped headers allowed.
  7. No merge type collectors allowed.
  8. No multiple merge type Tri-Y headers allowed. Headers must have all 4 primary tubes from each side going to only one standard collector per side.
- D. Mufflers
  1. Mufflers are mandatory, maximum of 2. (Maximum noise level 98db at 100 ft. track rule)
  2. Maximum tail pipe length: 10 inches from end of muffler.
- E. Exhaust must exit under car, inside of body panels, and behind driver.
- F. No body panel modifications for exhaust.

## **15 CARBURETION-**

- A. Carburetion will be limited to one stock Holley 2 barrel 500 CFM part#4412 with a 1 11/16" throttle bore.
- B. No grinding or polishing of any kind is allowed.
- C. All carburetor components must be for a Holley 500.
- D. No milling or grinding of throttle shaft is allowed. Shaft must remain round, and must have stock measurements. Carburetors with egg shaped throttle bores will not be allowed.
- E. Choke may be removed; air horn may not be modified.
- F. A 1 5/16" maximum carburetor spacer block including gaskets is allowed.
- G. Double throttle springs are required.

## **16 COOLING SYSTEM-**

- A. Aluminum radiators are allowed.
- B. Crank driven water pumps and fans must have belts only.
- C. Electric fans are allowed.
- D. No electric water pumps.
- E. Minimum 1qt. overflow container required.
- F. Water wetter or any non-ethylene glycol cooling, system lubricant may be used. NO ANTI-FREEZE! Track fine will be assessed for antifreeze use.

## **17 FUEL CELLS AND FUEL-**

- A. Fuel cells are mandatory, with a maximum capacity of 22 gallons. All fuel cells must be top fill and have an approved cap.
- B. Fuel cell tub must be 1/8" mild steel with a 1" top lip mandatory. Top of fuel cell may be 20 gauge steel with 4, straps 1 x 1/8. Front, bottom, and back must be one piece, or separate pieces welded together. Side pieces of same material welded together with a 1" top lip. Fuel cells must be secured with four (4) straps 1 x 1/8" steel using a minimum of grade 5 hardware or is perimeter bolted with a minimum grade 5 hardware 3" O.C. No pop rivets allowed. Fuel cells that are mounted and incased properly in 1/8" plate will not require straps.
- C. Safety foams and vent checks valve must be used.
- D. The ground clearance on the fuel cell must be 11" measured with driver in the car.
- E. No fuel lines can be run through driver's compartment.
- F. All cars must have fuel cell protector bar, angle braced. Guard must be 1" lower than fuel cell.
- G. Fuel cell with rubber bladders (spec. FT-3 minimum) recommended. These may be required in the future (track rules).
- H. Racing gas or regular pump gas only is allowed. No alcohol, additives, or nitrous allowed.
- L No electric fuel pumps allowed.

## **18 BRAKES-**

- A. All cars must have four wheels; foot operated hydraulic brakes in good working order. All brakes will be checked by the tech-inspectors.
- B. A dual or tandem master cylinder is mandatory.
- C. A brake-proportioning valve, adjustable from within the driver's compartment can be used.
- D. Single piston; cast iron, stock calipers only will be allowed.
- E. No rear disk brakes allowed.

## **19 BATTERY-**

- A. All batteries must be located outside of the driver's compartment and securely fastened. No rubber straps will be allowed to fasten batteries.
- B. A master on/off kill switch is required and must be mounted in center of interior and clearly labeled to allow safety crew access from both sides of car.

## **20 STEERING-**

- A. Collapsible steering columns with removable steering wheel are mandatory.

## **21 TIRES-**

- A. All cars racing with C.W.S.S.A must use approved tire. Current tires are the Goodyear D2462 and D2663 A300 compound.
- B. No system of heating, soaking, sipping, grinding, buffing, or changing the composition and character of the tire will be allowed.

NOTE: anyone caught carrying tire softener on the premises will be fined \$100.00 and be immediately suspended for two weeks.

## **22 WEIGHTS**

- A. All cars must meet minimum weight of 3000 pounds or greater after qualifying and races, with driver.
- B. All weights must be painted white with the car number displayed on them.
- C. The weight percentage for any car competing in or with the C.W.S.S.A. will be 58% maximum left side weight and 42% minimum right side weight.

NOTE: VISITING CARS SEE SECTION 2-28 FOR ADDITIONAL WEIGHT PENALTIES.  
THIS WILL BE ENFORCED AS IT IS WRITTEN, NO LEEWAY FOR ANYONE!

## **23 APPEARANCE-**

- A. Leave area of front fender behind the tire open for sponsor decals. (16 inches behind front wheel opening.)
- B. All cars are required to be neat in appearance, with bodies neatly painted and lettered. Badly damaged areas of the body should be repaired as soon as possible.
- C. Side numbers should be approximately 24"h x 5"w and centered on the doors like NASCAR racecars.
- D. Head and taillight numbers should be approximately 5"h.
- E. Leave top 8 inches of windshield open for C.W.S.S.A. decal.

## **24 SAFETY-**

- A. A minimum of (5) point racing harness with 3" shoulder and lap belts is mandatory. The belt anchors must be mounted to a cage or frame member.
- B. Aluminum racing seat with headrest and drivers side head support is mandatory, (head support for both sides is recommended). The head support may be mounted to the seat or roll bar directly or be a net type style.
- C. The seat is to be mounted a minimum of 16 "form the inside of the drivers door bars to the centerline of the seat.
- D. Seat mounts must be bolted or welded to the frame, roll cage, or 1/8" steel driver's plate, and not to any lightweight materials.
- E. All belts and mounting are subject to tech inspector's approval.
- F. A minimum of a SNELL SA2000 (now required at Golden Sands and Marshfield Super Speedway) rated helmet with shield or goggles is required.
- G. Approved fire-retardant driving suits and gloves are mandatory. Fire retardant shoes, cervical neck collar, leg and head restraints are highly recommended
- H. A window safety net in driver's window with a quick release is mandatory.
- I. Roll bar padding is required on any bars that are in the drivers contact area as well as the center of the steering wheel.
- J. A fully charged 5 # ABC rated fire extinguisher located within the drivers reach is mandatory.
- K. Additional requirements may be required, see track rules.

## **26 SPORTSMANSHIP-**

The C.W.S.S.A. advises that if a driver goes one or more laps down in any semi-feature or feature event and the drivers car is no longer competitive, said driver should take his/her car to the pit area and let those racing for position continue, "it would be the sporting thing to do". Drivers or crew members acting in a derogatory manner will be subject to a suspension determined by club or track officials.

## **27 ALCOHOL / DRUGS-**

Any driver with a detectable amount of alcohol or drugs present will not be allowed on the track. Drivers are responsible for the actions of their crewmembers.

## **28 VISITING CARS FROM OTHER TRACKS-**

**A. ALL DRIVERS MUST PAY TO COMPETE IN THE SUPER STOCK CLASS \$10.00 PER NIGHT FOR UP TO THREE NIGHTS. IF AFTER THREE TIMES YOU MEET THE RULES AND STILL WANT TO RACE HERE THEY DO NOT HAVE TO PAY ANY MORE. TO BE ELIGIBLE FOR OUR POINTS FUND YOU MUST RACE 75% OF RACES INCLUDING ONE AT EACH TRACK, AND PAY THE BALANCE OF \$30.00.**

B. Drivers must declare what items on their cars don't meet our rules and what track they're from. Visiting cars will be allowed to run only with a weight penalty if they do not meet our rules.

C. Weight penalties:

1. Aluminum intake 25 Lbs
2. Floating rear end 25 Lbs.
3. Undersize clutch (under 10") 25 Lbs.
4. Rear disk brakes 25 Lbs.
5. World Product Heads #1-0-52 50 Lbs.
6. Over 358 C.I. or 10.5 compression 50 Lbs.
7. Engines set back over 1-inch 25 Lbs.
8. Any other non-compliant equipment will not be allowed to compete.

D. Visiting cars, not falling into section E and F, will be allowed to race for 3 events total at either track, with these penalties. Also they will not get any track or clubpoints while running these penalties. After 3 events they will have to confirm to our rules.

E. Mid-Am cars: Fully legal mid-am cars will be allowed to run with a 50 # weight penalty and our Good Year tires and meet our carburetion rules in section 15 page 4. Holley 500CFM 2bbl part no 4412. If cars are deemed to have an advantage, the club may change weight penalty to keep competitive.

F. Allow Dells Super Stock cars to race in C.W.S.S.A events under the Dells 2009 super stock rules. With 1 year time limit, will review after 2010 season. If cars are deemed to have an advantage, the club may change weight penalty to keep competitive.

## **29 MISCELLANEOUS-**

Disqualification for any reason will result in forfeiture of points and money for the night, with money being awarded to the C.W.S.S.A. point fund. All determinations and decisions made by tech inspectors and club officials will be final. There will be a tech inspection following the feature event. The pole position driver at the start of the feature will draw a finishing position number and the car finishing in that position will be inspected. Any driver wishing to have another car inspected may do so by presenting the pit steward or head tech inspector with \$ 50.00 cash for an inspection fee prior to the start of the feature event. If the car should be found legal, the driver initiating the claim will still forfeit \$50.00. Twenty-five (25.00) will stay with the inspectors for their fees and \$25.00 will be given to the driver that was being accused of being illegal.


If the car is found illegal, \$25.00 will be returned to the driver initiating the claim. The illegal car will forfeit points and money for that night, and will not be allowed to race until the infractions are corrected. Inspection will not be done until after completion of feature race. Please remember that evidence of cheating needs to be found before any major teardowns (pull intake, head, etc.) will be allowed.

### NOTICE

THESE RULES NEED ONE LAST PAGE OF DIAGRAMS FOLLOWING THIS PAGE TO BE COMPLETE. ANY DRIVER OR PERSON WANTING A COPY OF THEM CALLS ONE OF THE OFFICERS LISTED ON FRONT PAGE.


ANY ITEM NOT COVERED BY THESE RULES OR MISSED WILL BE UP TO THE DISCRETION OF THE BOARD OF DIRECTORS AND TECH. PEOPLE OF THE C.W.S.S.A., ALL DECISIONS WILL BE FINAL.

CWSSA CHASSIS SPECS

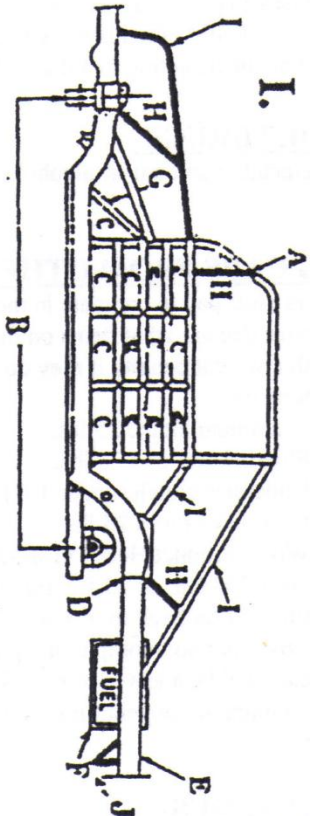


MID-AMERICAN CONSTRUCTION GUIDE LINES

- (A)-WING WINDOW BARS (MANDATORY).
- (B)-WHEEL BASE (108" MINIMUM).
- (C)-MANDATORY SAFETY PLATING (1/8" STEEL MINIMUM).
- (D)-STOCK FRAME THIS POINT FORWARD, EXCLUDING SPRING BUCKETS.
- (E)-REAR FRAME TAIL SECTION (2" X 3" X .096 WALL STEEL TUBING.)
- (F)-FUEL CELL CAN MANDATORY (MATERIAL: 20 GAUGE STEEL.)
- (G)-FOOT AREA PROTECTION BAR (MANDATORY.)
- (H)-DARK SHADED BARS MAY BE .065 1 1/2" OR HEAVIER.
- (I)-ALL CAGES MUST HAVE THESE FRONT & REAR SUPPORT HOOPS/BARS.
- (J)-BRACED .065 FUEL CELL GUARD.

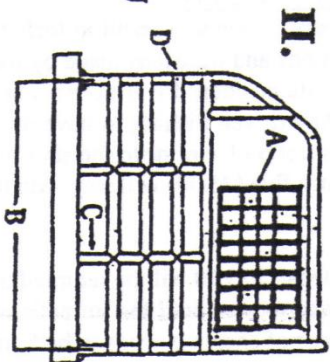


(DRIVERS/SIDE DOOR)

- (A)-APPROVED RACING WINDOW-NET (MANDATORY)
  - (B)-RECOMMENDED DOOR/BAR LENGTH (44" ON EXISTING CARS, CARS AFTER THE 1992 SEASON) (MIN. 40" ON EXISTING CARS.)
  - (C)-2 DOOR/BAR UP-RIGHTS BETWEEN EACH DOOR/BAR (MANDATORY)
  - (D)-4 DOOR/BARS EVENLY SPACED ON DRIVERS/SIDE (MANDATORY)
- NOTE  
ALL DRIVERS SIDE DOOR/BAR MATERIAL (MIN. 1-3/4" X .095)




RIGHT SIDE VIEW  
DOOR BAR CONFIGURATION

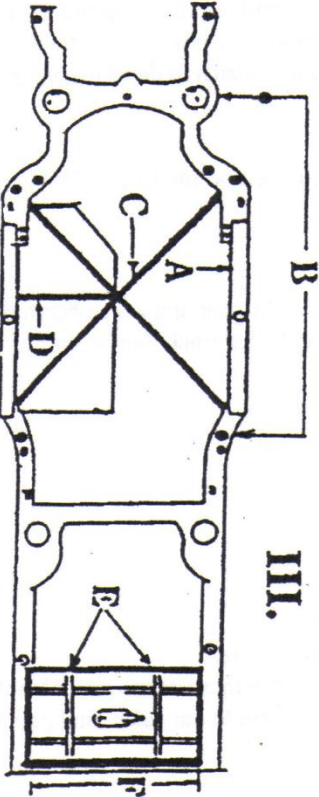

MID-AMERICAN CONSTRUCTION GUIDE LINES  
(REAR-VIEW)

- (A)-FRAME PLATING MATERIAL (4" X 1/8") FLAT STRIP STEEL
  - (B)-ROLL-OVER MAIN/HOOP SET BACK 82-1/2" MEASURED FROM CENTER OF LOWER BALL/JOINT TO BACK OF MAIN/HOOP TUBING.
  - (C)-MANDATORY X-BRACE (CHOOSE 1 NO MIXING OF MATERIALS.)
  - (D)-DRIVERS COMPARTMENT SAFETY/BAR (SAME MATERIAL AS X-BRACE.)
  - (E)-FUEL/CELL SAFETY STRAPS (MIN. 4) 1" X 1/8" STRAP STEEL.
  - (F)-TAIL SECTION REPAIR CEMENT SAME DIMENSIONS AS STOCK FRAME.
- \*\*\* NOTE \*\*\*  
X-BRACE MUST BE IN TO ORIGINAL FRAME, NOT FRAME PLATING.

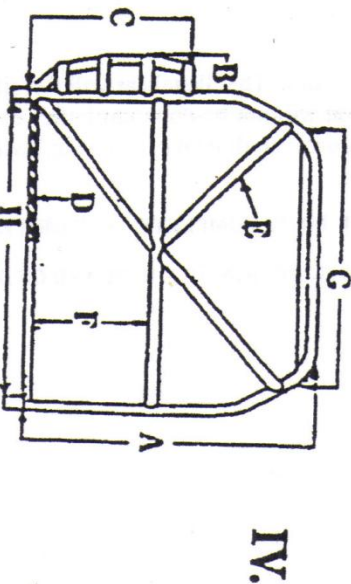

- (A)-MAIN HOOP VERTICAL TO FRAME) 39" HIGH FROM TOP OF FRAME.
  - (B)-DOOR/BARS SHOULD BE FLUSH TO DOOR PANEL. (WITH THE BODY.-CENTERED & MOUNTED IN STOCK LOCATION ON THE FRAME.)
  - (C)-DOOR/BAR HEIGHT-(MIN. 20" HIGH FROM TOP OF FRAME.)
  - (D)-FLOOR MAIN HOOP/HEAD REST BAR. (OPTIONAL) RECOMMENDED.
  - (E)-EXTRA MAIN HOOP/HEAD REST BAR. (OPTIONAL) RECOMMENDED.
  - (F)-CROSS/BAR RECOMMENDED HEIGHT 20" (FOR SHOULDER HARNESS.)
  - (G)-ROOF/HOOP TO FIT ROOF SIDE TO SIDE. (MIN. LENGTH 34")
  - (H)-ROLL-CAGE WIDTH-(SAME AS STOCK FRAME WIDTH.)
- (J)-BRACED .065 FUEL CELL GUARD.